


# AMG 32 / 55 PULLEY GUIDE

1. Remove old pulley
2. Set the gap to the **0,2 mm** adding or removing shims to avoid springs failure.



Must be 0,2 mm here

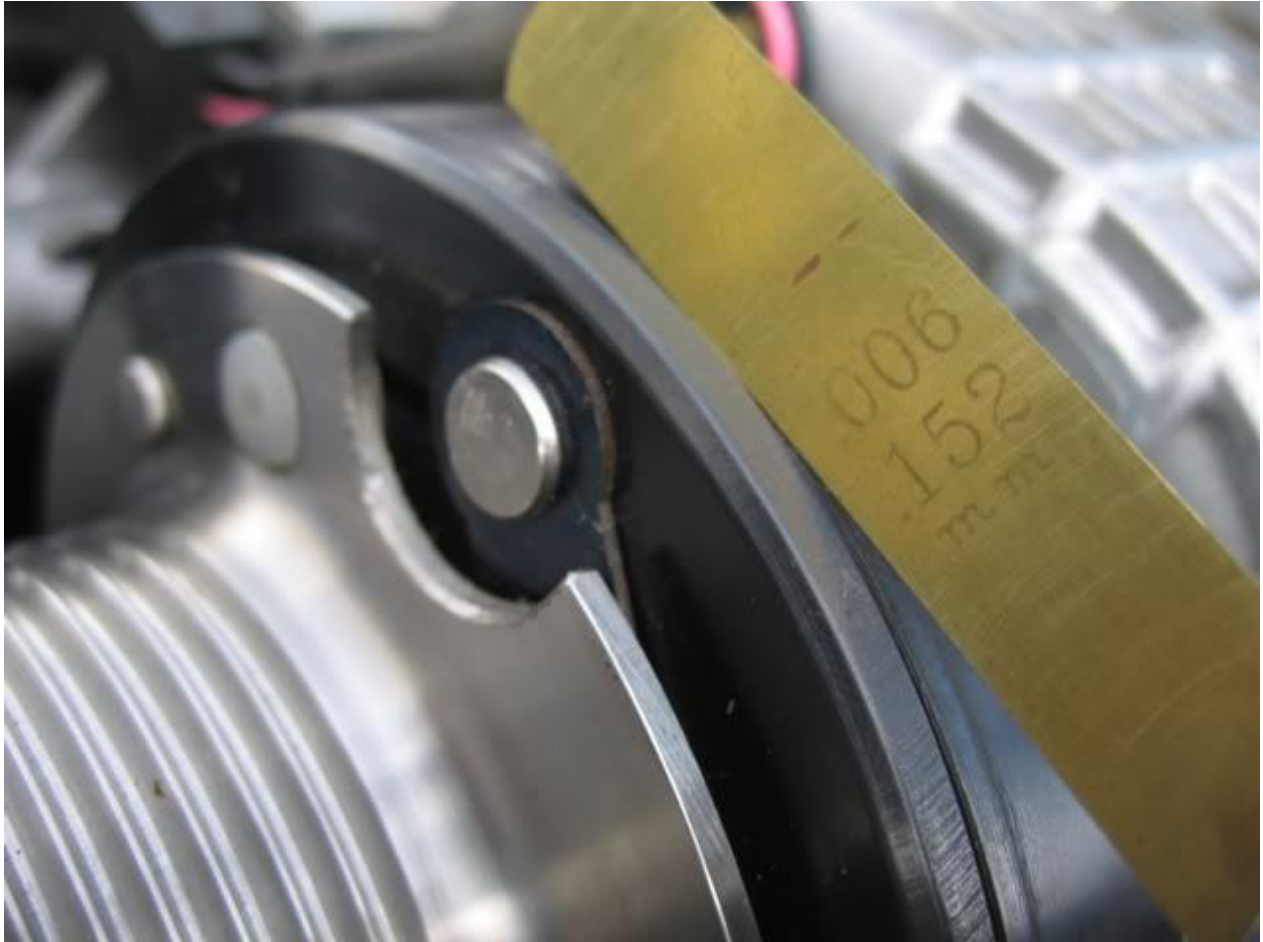

3. Apply the copper grease to the main bolt.



4. Tight the main bolt using **20 Nm** torque.



Pictures were taken from ACRucrazy ([crossfireforum.org](http://crossfireforum.org))